



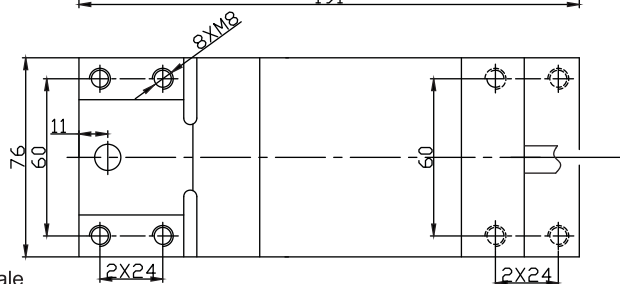

AMIQ

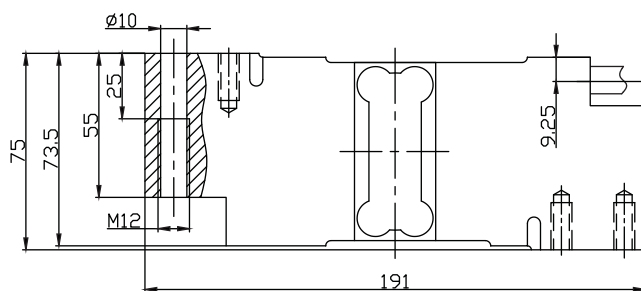

TECHNICAL PARAMETER

Rated capacities(Emax)	8,10,15,20,30,50,60,75,100,200kg	Temperature range, compensated	-10℃~+40℃
Sensitivity	2.0±0.2mV/V	Temperature range, operating	-20℃~+50℃
Accuracy class	OIML C3(approving)	Maximum safe overload	150%Emax
Creep error (30min)	±166ppm	Ultimate overload	300%Emax
Zero balance	±3%Emax	Excitation,recommended	10V DC
TC ZERO	±17.5ppm/℃	Excitation,maximum	15V DC
TC SPAN	+20℃~+40℃, ±17.5ppm/℃	Protection class	IP65
	-10℃~+20℃, ±11.67ppm/℃	Construction	Aluminium
Input resistance	404±15Ω	Cable	Length:1.8m
Output resistance	350±3Ω		Diameter: φ 5mm
Insulation resistance	≥2000 M Ω (50V DC)	Installation torque,recommended	10N · m
Max platform size	300×400mm		

www.keli-cee.pl